Pursuing
The Precision
Serving
The World

D01
03
05
07
09
11
13
15
17
19
21
23
25

带表卡规
Dial Caliper Gauge

D

公制带表内卡规
Metric Inside Dial Caliper Gauges

公制带表外卡规
Metric Outside Dial Caliper Gauges

英制带表内卡规
Inch Inside Dial Caliper Gauges

英制带表外卡规
Inch Outside Dial Caliper Gauges

数显卡规
Digital Caliper Gauges

数显卡规
DIGITAL CALIPER GAUGES

性能及特点

- 任意位置置零
- 任意位置进行公英制转换
- 置数功能
- 串行输出口可与微机或打印机联接进行数据处理

511-605

FEATURES

- Zeroing at any position
- Metric/inch switching
- Presetting
- Data output can interfacing with a computer or a printer via special converter to process data.

512-601

外形尺寸图 DIMENSIONS(mm)

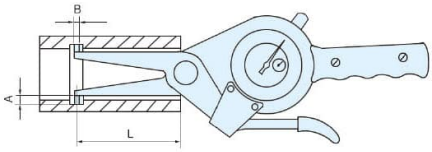

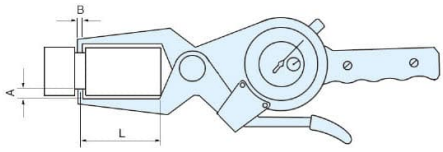

主要技术参数 SPECIFICATIONS

货号	型号	分度值	测量范围	外形尺寸(mm)		
Nr.	Model	Grad.(mm)	Range (mm)	A	B	L
511-603	NKG15-35	0.01	15-35mm	3	ø3	50
511-604	NKG35-55	0.01	35-55mm	6	ø3	80
511-605	NKG55-75	0.01	55-75mm	8	ø3	90
511-606	NKG75-95	0.01	75-95mm	8	ø3	100
511-607	NKG95-115	0.01	95-115mm	10	ø3.2	150
511-608	NKG115-135	0.01	115-135mm	10	ø3.2	150
511-609	NKG135-155	0.01	135-155mm	10	ø3.2	200
512-601	WKG0-20	0.01	0-20mm	6	ø3	60
512-602	WKG20-40	0.01	20-40mm	6	ø3	60
512-603	WKG40-60	0.01	40-60mm	6	ø3	55
512-604	WKG60-80	0.01	60-80mm	6	ø3	55
512-605	WKG80-100	0.01	80-100mm	6	ø3	55

中二针型带表卡规
COAXIAL POINTER TYPE DIAL CALIPER GAUGES

公制带表内卡规
Metric Inside Dial Caliper Gauges

517–103

性能及特点

- 大小指针同轴转动，更易读数
- 内公差指示器，可设置公差带
- 内盘数字更大，适应各种工作场景
- 可选配合金测头或者陶瓷测头
- 可根据用户需求个性化定制非标产品

FEATURES

- The large and small hands rotate coaxially, facilitating reading
- Internal tolerance hand with adjustable tolerance band
- The inner dial displays larger numbers and adapts to various work scenarios
- Optional alloy or ceramic ball anvils
- Non–standard products can be customized according to user requirements

外形尺寸图 DIMENSIONS(mm)

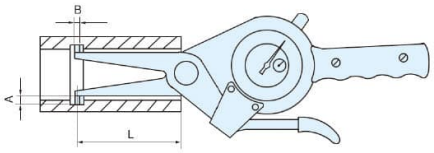

517–106

主要技术参数 SPECIFICATIONS

货号	型号	分度值	测量范围	外形尺寸(mm)		
Nr.	Model	Grad.(mm)	Range(mm)	A	B	L
517–103	NKG15–35	0.01	15–35	3	Ø3	50
517–104	NKG35–55	0.01	35–55	6	Ø3	80
517–105	NKG55–75	0.01	55–75	8	Ø3	90
517–106	NKG75–95	0.01	75–95	8	Ø3	100
517–107	NKG95–115	0.01	95–115	10	Ø3.2	150
517–108	NKG115–135	0.01	115–135	10	Ø3.2	150
517–109	NKG135–155	0.01	135–155	10	Ø3.2	200
517–110	NKG155–175	0.01	155–175	10	Ø3.2	200
517–111	NKG175–195	0.01	175–195	10	Ø3.2	200
517–112	NKG195–215	0.01	195–215	10	Ø3.2	200
517–113	NKG215–235	0.01	215–235	10	Ø3.2	200
517–114	NKG235–255	0.01	235–255	10	Ø3.2	200
517–115	NKG255–275	0.01	255–275	10	Ø3.2	200
517–116	NKG275–295	0.01	275–295	10	Ø3.2	200
517–117	NKG295–315	0.01	295–315	10	Ø3.2	200
517–118	NKG315–335	0.01	315–335	10	Ø3.2	200
517–119	NKG335–355	0.01	335–355	10	Ø3.2	200
517–120	NKG355–375	0.01	355–375	10	Ø3.2	200
517–121	NKG375–395	0.01	375–395	10	Ø3.2	200

中二针型带表卡规
COAXIAL POINTER TYPE DIAL CALIPER GAUGES

公制带表外卡规
Metric Outside Dial Caliper Gauges

性能及特点

- 大小指针同轴转动，更易读数
- 内公差指示器，可设置公差带
- 内盘数字更大，适应各种工作场景
- 可选配合金测头或者陶瓷测头
- 可根据用户需求个性化定制非标产品

FEATURES

- The large and small hands rotate coaxially, facilitating reading
- Internal tolerance hand with adjustable tolerance band
- The inner dial displays larger numbers and adapts to various work scenarios
- Optional alloy or ceramic ball anvils
- Non-standard products can be customized according to user requirements

518-101

518-105

外形尺寸图 DIMENSIONS(mm)

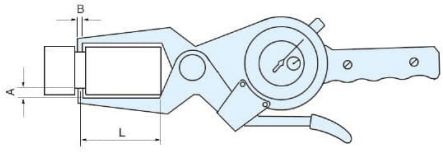

主要技术参数 SPECIFICATIONS

货号	型号	分度值	测量范围	外形尺寸(mm)		
Nr.	Model	Grad.(mm)	Range(mm	A	B	L
518-101	WKG0-20	0.01	0-20	6	Ø3	60
518-102	WKG20-40	0.01	20-40	6	Ø3	60
518-103	WKG40-60	0.01	40-60	6	Ø3	55
518-104	WKG60-80	0.01	60-80	6	Ø3	55
518-105	WKG80-100	0.01	80-100	6	Ø3	55
518-106	WKG100-120	0.01	100-120	10	Ø3.2	95
518-107	WKG120-140	0.01	120-140	10	Ø3.2	95
518-108	WKG140-160	0.01	140-160	10	Ø3.2	95
518-109	WKG160-180	0.01	160-180	10	Ø3.2	95
518-110	WKG180-200	0.01	180-200	10	Ø3.2	95
518-111	WKG200-220	0.01	200-220	10	Ø3.2	120
518-112	WKG220-240	0.01	220-240	10	Ø3.2	120
518-113	WKG240-260	0.01	240-260	10	Ø3.2	120

带表卡规
DIAL CALIPER GAUGES

公制带表内卡规
Metric Inside Dial Caliper Gauges

性能及特点

- 测量范围大于395mm以上的带表内卡规，可根据用户要求特殊加工
- 测量范围大于95mm以上内卡规配防震百分表

FEATURES

- The inside dial caliper gauges with measuring rang over 395mm can be made upon request
- The inside caliper gauge match with shockproof dial indicator above 95mm of measuring range

511–103

511–105

外形尺寸图 DIMENSIONS(mm)

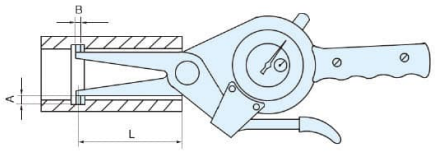

主要技术参数 SPECIFICATIONS

货号	型号	分度值	测量范围	外形尺寸(mm)		
Nr.	Model	Grad.(mm)	Range (mm)	A	B	L
511–102	NKG10–30	0.01	10–30	2.5	ø1.8	50
511–103	NKG15–35	0.01	15–35	3	ø3	50
511–104	NKG35–55	0.01	35–55	6	ø3	80
511–105	NKG55–75	0.01	55–75	8	ø3	90
511–106	NKG75–95	0.01	75–95	8	ø3	100
511–107	NKG95–115	0.01	95–115	10	ø3.2	150
511–108	NKG115–135	0.01	115–135	10	ø3.2	150
511–109	NKG135–155	0.01	135–155	10	ø3.2	200
511–110	NKG155–175	0.01	155–175	10	ø3.2	200
511–111	NKG175–195	0.01	175–195	10	ø3.2	200
511–112	NKG195–215	0.01	195–215	10	ø3.2	200
511–113	NKG215–235	0.01	215–235	10	ø3.2	200
511–114	NKG235–255	0.01	235–255	10	ø3.2	380
511–115	NKG255–275	0.01	255–275	10	ø3.2	380
511–116	NKG275–295	0.01	275–295	10	ø3.2	380
511–117	NKG295–315	0.01	295–315	10	ø3.2	380
511–118	NKG315–335	0.01	315–335	10	ø3.2	200
511–119	NKG335–355	0.01	335–355	10	ø3.2	200
511–120	NKG355–375	0.01	355–375	10	ø3.2	200
511–121	NKG375–395	0.01	375–395	10	ø3.2	200

511–102

带表卡规
DIAL CALIPER GAUGE

公制带表外卡规
Metric Outside Dial Caliper Gauges

02
04
D06
08
10
12
14
16
18
20
22
24
26

性能及特点

- 测量范围大于260mm以上的带表外卡规，可根据用户要求特殊加工
- 测量范围大于100mm以上外卡规配防震百分表

FEATURES

- The outside dial caliper gauges with measuring rang over 260 mm can be made upon request
- The outside caliper gauge match with shockproof dial indicator above 100mm of measuring range

512–101

512–105

主要技术参数 SPECIFICATIONS

货号	型号	分度值	测量范围	外形尺寸(mm)		
Nr.	Model	Grad.(mm)	Range (mm)	A	B	L
512–101	WKG0–20	0.01	0–20	6	∅3	60
512–102	WKG20–40	0.01	20–40	6	∅3	60
512–103	WKG40–60	0.01	40–60	6	∅3	55
512–104	WKG60–80	0.01	60–80	6	∅3	55
512–105	WKG80–100	0.01	80–100	6	∅3	55
512–106	WKG100–120	0.01	100–120	10	∅3.2	95
512–107	WKG120–140	0.01	120–140	10	∅3.2	95
512–108	WKG140–160	0.01	140–160	10	∅3.2	95
512–109	WKG160–180	0.01	160–180	10	∅3.2	95
512–110	WKG180–200	0.01	180–200	10	∅3.2	95
512–111	WKG200–220	0.01	200–220	10	∅3.2	120
512–112	WKG220–240	0.01	220–240	10	∅3.2	120
512–113	WKG240–260	0.01	240–260	10	∅3.2	120

外形尺寸图 DIMENSIONS(mm)

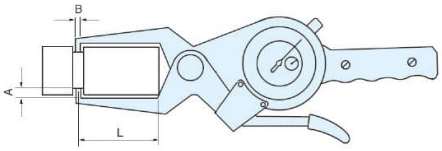

带表卡规 DIAL CALIPER GAUGES

英制带表卡规 Inch Dial Caliper Gauges

512–202

主要技术参数 SPECIFICATIONS

货号	型号	测量范围	分度值	外形尺寸(in)		
Nr.	Model	Range (in)	Grad.(in)	A	B	L
512–201	WKG31	0–0.8	0.0005	0.236	0.118	2.3
512–202	WKG32	0.8–1.6	0.0005	0.236	0.118	2.3
512–203	WKG33	1.6–2.4	0.0005	0.236	0.118	2.1
512–204	WKG34	2.4–3.2	0.0005	0.236	0.118	2.1
512–205	WKG35	3.2–4.0	0.0005	0.236	0.118	2.1
512–301	WKG41	0–0.8	0.001	0.236	0.118	2.3
512–302	WKG42	0.8–1.6	0.001	0.236	0.118	2.3
512–303	WKG43	1.6–2.4	0.001	0.236	0.118	2.1
512–304	WKG44	2.4–3.2	0.001	0.236	0.118	2.1
512–305	WKG45	3.2–4.0	0.001	0.236	0.118	2.1

外形尺寸图 DIMENSIONS(in)

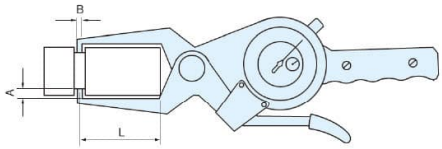

511–304

主要技术参数 SPECIFICATIONS

货号	型号	测量范围	分度值	外形尺寸(in)		
Nr.	Model	Range (in)	Grad.(in)	A	B	L
511–203	NKG11	0.6–1.4	0.0005	0.118	0.118	1.9
511–204	NKG12	1.4–2.2	0.0005	0.236	0.118	3.1
511–205	NKG13	2.2–3.0	0.0005	0.315	0.118	3.1
511–206	NKG14	3.0–3.8	0.0005	0.315	0.118	3.9
511–303	NKG21	0.6–1.4	0.001	0.118	0.118	1.9
511–304	NKG22	1.4–2.2	0.001	0.236	0.118	3.1
511–305	NKG23	2.2–3.0	0.001	0.315	0.118	3.1
511–306	NKG24	3.0–3.8	0.001	0.315	0.118	3.9

外形尺寸图 DIMENSIONS(in)

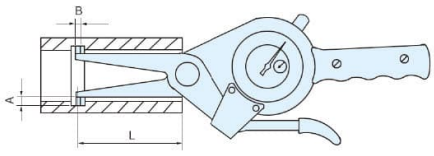

带表卡规 DIAL CALIPER GAUGES

大量程带表外卡规 Dial Caliper Gauges

02
04
06
D08
10
12
14
16
18
20
22
24
26

512–401

外形尺寸图 DIMENSIONS(mm)

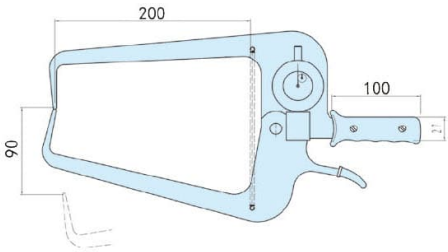

主要技术参数 SPECIFICATIONS

货号 Nr.	型号 Model	分度值 Grad.(mm)	测量范围 Range(mm)
512–401	WKG0–90	0.1	0–90
512–402	WKG0–80	0.1	0–80
512–501	WKG0–50	0.05	0–50

外形尺寸图 DIMENSIONS(mm)

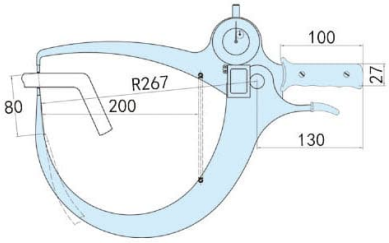

512–402

大测深带表内卡规
DIAL CALIPER GAUGES

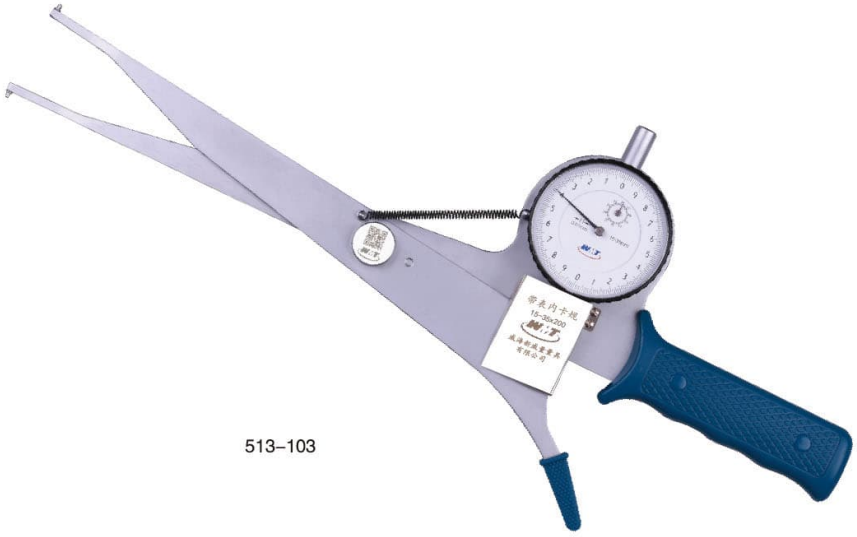

513–103

主要技术参数 SPECIFICATIONS

货号 Nr.	型号 Model	分度值 Grad.(mm)	测量范围 Range(mm)	外形尺寸 A	B		L	
513–103	NKG15–35	0.01	15–35	3	Φ3	160	200	250
513–104	NKG35–55	0.01	35–55	13	Φ3	160	200	250
513–105	NKG55–75	0.01	55–75	8	Φ3	160	200	250

外形尺寸图 DIMENSIONS(mm)

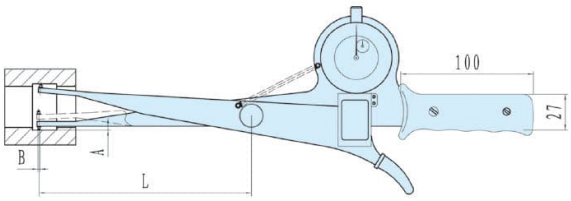

快速卡规
External Quick Caliper

514–101

外形尺寸图 DIMENSIONS(mm)

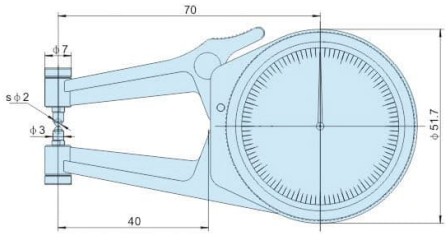

主要技术参数 SPECIFICATIONS

货号 Nr.	型号 Model	分度值 Grad.(mm)	测量范围 Range(mm)
514–101	WKG0–10	0.1	10